

SEMI FULLHEIGHT
TURNSTILE

T 1400 Semi-Fullheight Turnstile



TURNSTILE



HIGHER SECURITY, TROUBLE-FREE, ROBUST MECHANISM, LONG YEARS, ANTI-VANDAL, SOLID, DURABLE, RELIABLE PRODUCT, INDOOR & OUTDOOR CONDITIONS


T 1400 fullheight turnstile is designed to provide higher level of security for locations requiring strict access control. It has been produced in design and in sizes in order to prevent unauthorized passages.

Application: T 1400 can be installed in the entrance of construction sites, factories, stadiums, ministries, prisons and any locations where security is a high priority.

Basic Materials: T 1400 can be AISI 304 & 316 stainless steel. The inner main mechanism of T 1350 is produced with special investment casting technology, which makes the whole system a lot more robust and lasting. The electronic boards are designed by the qualified engineers of Makim, enabling T1400 work in various modes and entegrations.

General Use: T 1400 is manufactured in single version. The passage way of T 1400 is 90° positioned arms, as four armed. T 1400 electromechanic turnstile operates bi-directionally and has a self-centering mechanism, returning to its original position in any case. All kind of access control system like card reader, biometric reader, remote control unit or push button can be entegrated to T 1400 via simple dry-contact. Once the access right is granted, user should touch slightly to T 1400 arm in order to make it rotate. After the arms complete one turn, T 1400 is automatically locked. If the user does not use the passage right in 15 seconds, T 1400 will give buzzer warning and it will be locked. Status indicator LED lights are located on both sides of T 1400, in green arrow and red cross shape to show allowed passage directions.

Safety: In case of power cut, T 1400 is unlocked to allow free rotation of the arms in both sides enabling easy evaquation of the area and preventing getting stuck inside the gate.

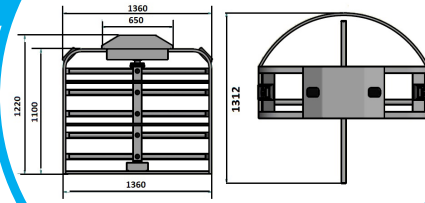

Specifications

Control /Operation Voltage	: 24VDC +/-20%
Power Consumption	: 30W
Tripod Locking	: With 24 V DC selenoids; lock when the selenoids are pulled.
Tripod Position Dedection	: Direction of the tripod position with two microswitches.
Motion Control	: When the cycle starts to one direction, the reverse is blocked and after a half turn the rest of the cycle is completed, automatically and smoothly by a hydraulic shock absorber.
Installation	: Simple & easy installation
Operation Temperature	: - 20° C - + 70° C
Indicators	: LED on both sides
Dimensions	: 1360x1312x1220 mm
Weight	: 280 Kg
Optional Accesories	: Remote control, button unit, card reader, biometric reader.

MAKIM[®]

makim.com.tr
makimaccesscontrol.com
makimturnstile.com

Factory

Address: Sincan Organize Sanayi Bölgesi, Erkunt Cad. No: 20
Sincan ANKARA
Tel: + 90 (312) 267 56 87 Faks: 0 (312) 267 56 99
satis@makim.com.tr

Branch

Address: Perpa Ticaret Merkezi, B Blok Kat: 7-8 No: 987-989
Şişli İSTANBUL
Tel: +90 (212) 210 29 41 Faks: 0 (212) 210 68 15
sube@makim.com.tr